
BTGRF18




PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors
- Solid front that hinges at base
- Deck forced refrigeration
- Three adjustable shelves flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

Maximum shelf load weight 15kg spread evenly Adjustable rear or front venting



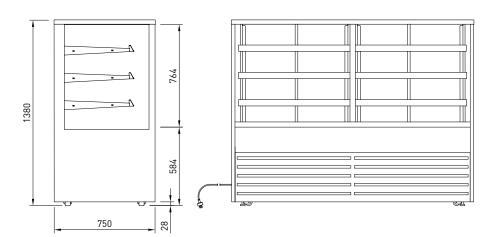

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET			SHELVING	SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]													NZ/AUS 10 AMP			LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGRF18	1800	750	1380	380	3 x 2 + BASE	3-5	827 X 445	1740 x 510	325	3.14	0.91	50 Hz	R290	1.52	8.3	3 PIN PLUG	3 PIN PLUG	220- 240V	1900	830	1550	388



