

Convotherm mini mobile easyTouch Combi Steamer

CMINIT6.06MOB ELECTRIC DIRECT STEAM 6 X 2/3 GN

- Direct steam system
- Requires minimum space - fits anywhere, saving expensive floor space
- Mobile version - with built-in water and wastewater drawers (no fixed water supply connection required)
- Natural Smart Climate™ (ACS+) cooking methods: Steam, Combi-steam, Convection
- Natural Smart Climate™ extra functions:
 - Crisp&Tasty - 3 moisture removal settings
 - HumidifyPro - 3 humidity settings
 - BakePro - 3 levels of traditional baking
 - Reduced fan speed and auto-reverse mode
- easyTouch 7" TFT HiRes glass touch display (capacitive)
- Semi-automatic cleaning system
- HygieniCare
- WiFi and Ethernet interface (LAN)
- USB port integrated in the control panel
- Hand shower
- Right-hinged appliance door



Standard Features

- Cooking methods:
 - Steam (30-130°C) with guaranteed steam saturation
 - Combi-steam (30-250 °C) with automatic moisture control
 - Convection (30-250 °C) with optimised heat transfer
 - Regenerating function
- Operation of easyTouch user interface:
 - 7" TFT HiRes glass touch display (capacitive)
 - Smooth-action, quick reacting scrolling function
- Climate Management
 - Natural Smart Climate™ (ACS+), HumidityPro, Crisp&Tasty
- Quality Management
 - Airflow Management, BakePro, Multi-point core temperature probe
 - Preheat and cool down function
- Production Management
 - Automatic cooking with Press&Go with up to 399 cooking profiles
 - Integrated cookbook with 6 different categories
 - TrayTimer – load management for different products at the same time (manual mode)
 - TrayView – load management for automatic cooking of different products using Press&Go
 - Favourites management
 - HACCP data storage
 - USB port
 - ecoCooking – energy-save function
 - LT cooking (low temperature cooking) / Delta-T cooking
 - Cook&Hold – cook and hold in one process
 - Autostart
 - Regenerate - flexible multi-mode rethermalisation function with preselect

- HygieniCare:
 - Hygienic handles (door and hand-shower handles)
 - Hygienic Steam function
 - Hygienic touch film

Options

- Left-hinged appliance door
- Available in various voltages
- Safety door latch (with sure-shut function and venting position)


Accessories

- Stands in various sizes and designs
- Care products for ConvoClean cleaning system
- Wall holder
- RO Systems available if water quality is outside of specification


Convotherm mini mobile easyTouch Combi Steamer

CMINIT6.06MOB ELECTRIC DIRECT STEAM 6 X 2/3 GN


Front view

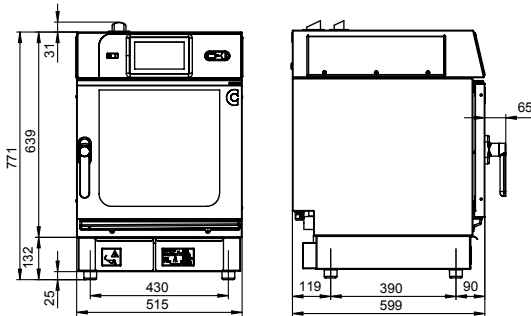


View from above with wall clearances

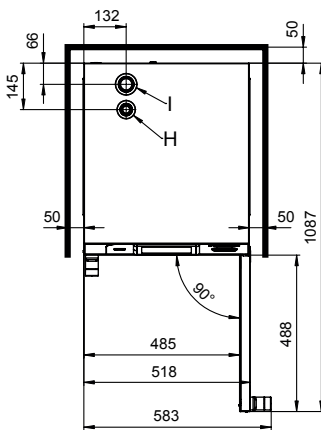

Rear view



Connection positions in appliance floor



- A Drinking water drawer
- B Wastewater drawer
- C Electrical connection
- D Equipotential bonding
- E Air vent Ø 30 mm
- I Dry air intake Ø 43 mm
- N RJ45 Ethernet port
- Q Safety thermostat reset

DIMENSIONS

Width	515 mm
Depth	599 mm
Height	771 mm
Weight	54 kg

PACKED DIMENSIONS

Width	580 mm
Depth	740 mm
Height	955 mm
Weight (including cleaning system)	66 kg

Safety clearances

Rear	50 mm
Right	50 mm
Left	50 mm
(larger recommended for servicing)	
Top (for ventilation)	500 mm

INSTALLATION REQUIREMENTS

Appliance must be installed level. Do not install the appliance near, above or below a source of heat or near flammable surfaces

LOADING CAPACITY

Shelf distance	40mm
GN 2/3 shelves (40mm deep)	6

ELECTRICAL SUPPLY

1N~230-240V ~ 50/60Hz (1P+N+E) or 3N~400-415V ~50/60Hz (3P+N+E)
 Connected load 5.7 kW
 Rated current 11.8 A
 Fit main switch (all-pin-circuit-breaker) on site, in close proximity to the appliance. Connection for potential compensation.

WATER CONNECTION

Water supply
 Water drawer
 Capacity to hold 5.5L

WATER QUALITY

Drinking water
 Overall hardness 70-125 ppl
Properties
 pH 6.5 - 8.5
 Cl⁻ (chloride) max. 60 mg/l
 Cl₂ (free chlorine) max. 0.2 mg/l
 SO₄²⁻ (sulphate) max. 150 mg/l
 Fe (iron) max. 0.1 mg/l
 Electrical conductivity min 20 µS/cm
 Waste water drawer
 Maximum capacity 4.5L

EMISSIONS

Heat output
 Latent heat 1000 KJ/h
 Sensible heat 1100 KJ/h

Noise during operation max. 70 dBA
 Spray guard 1P×4



Australia
moffat.com.au

New Zealand
moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
 740 Springvale Road
 Mulgrave, Victoria 3170
 Ph 03-9518 3888
 Fax 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
 Ph 02-8833 4111
nswsales@moffat.com.au

South Australia
 Ph 03-9518 3888
vsales@moffat.com.au

Queensland
 Ph 07-3630 8600
qldsales@moffat.com.au

Western Australia
 Ph 08-9413 2400
wsales@moffat.com.au

New Zealand
Moffat Limited

Christchurch
 45 Illinois Drive
 Izone Business Hub
 Rolleston 7675
 New Zealand
 Telephone +64 3-983 6600
 Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
 Ph +64 9-574 3150
sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
 AN.CON.S.1.22

