





CW2H

1200mm 2 Hole Gas Waterless Woks

CW2H-CC 2 Hole, 2 Chimney Burners

CW2H-CD 2 Hole, 1 Chimney Burner, 1 Duckbill Burner

CW2H-DD 2 Hole, 2 Duckbill Burners



Also Available





Duckbill burner



Chimney burner

1 NZ models Duckbill burner rating 105MJ/hr Natural Gas / 85MJ/hr on LP gas.

- 800mm compact depth
- Cobra suite matching
- Waterless wok deck
- 14" wok hole
- Duckbill and Chimney burner model options
- 105 MJ/hr 18 jet Duckbill burners¹
- 95 MJ/hr 24 jet Chimney burners
- · High splashback with shelf
- Water folding laundry arm on splashback
- Rear waste channel
- Stainless steel spill tray
- Lift out wok ring
- Flame failure protection with pilot burner

OVERALL CONSTRUCTION

- Full chassis construction
- Double skin insulated wok deck
- Stainless steel exterior finish
- Heavy-duty cast iron wok rings (removable)
- Stainless steel spill tray
- 63mm dia. stainless steel legs with adjustable feet

CONTROLS

- Pilot On/Off control with flame failure valve
- Main burner On/Off valve with High-Low burner adjustment
- Quarter turn main burner control handles
- Quarter turn water valve handle

CLEANING AND SERVICING

- Stainless steel exterior finish
- Lift out wok rings for full cleaning ability
- Slide out spill tray
- Rear waste channel with removable grate for debris collection
- Access to all parts from front and top for servicing





COBR






CW2H


1200mm 2 Hole Gas Waterless Woks

CW2H-CC 2 Hole, 2 Chimney Burners

CW2H-CD 2 Hole, 1 Chimney Burner, 1 Duckbill Burner

CW2H-DD 2 Hole, 2 Duckbill Burners

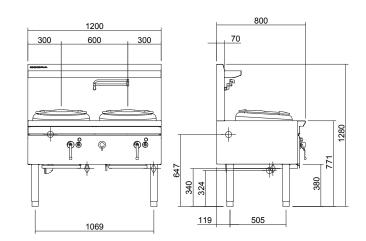



CW2H

SPECIFICATIONS

95MJ/hr 24 jet Chimney burner 105MJ/hr 18 jet Duckbill burner

105MJ/hr 18 jet Duckbill burner (NZ - LP gas rating 85 MJ/hr)

Gas Rating - Total CW2H-CC 190 MJ/hr CW2H-CD 200 MJ/hr (*NZ- LP gas rating 180 MJ/hr*) CW2H-DD 210 MJ/hr (*NZ- LP gas rating 170 MJ/hr*)

14" wok ring Suits woks 40-60cm / 16-24"

Gas connection (x2) Separate gas connection for each wok hole. R3/4 (BSP) male each wok hole 506mm from rear, 340mm from floor, 68mm and 668mm from RH side All units supplied with Natural-LP gas regulators for each wok connection

Supplied gas regulators include Test Point for appliance operating pressure Supplied regulator(s) must be fitted to each appliance gas connection when installed

Water connection Cold water connection 1 x 1/2" O.D. copper tube 475mm from rear,325mm from floor 494mm from RH side

Drain connection Connection to waste drain 1-1/4" BSP drain waste 107mm from rear, 647mm from floor, 203mm from LH side Dimensions Width 1200mm Depth 800mm Height 771mm Incl. splashback 1280mm Nett weight 135kg

Packing data 1.48m3, 211kg Width 1235mm Depth 865mm Height 1382mm

Gas types Available in Natural gas and LP gas, please specify when ordering



moffat.com.au moffat.co.nz

Australia moffat.com.au

Moffat Pty Limited

Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170 Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au

New South Wales Telephone +612-8833 4111 nswsales@moffat.com.au

South Australia Telephone +613-9518 3888 vsales@moffat.com.au

Queensland Telephone +617-3630 8600 qldsales@moffat.com.au

Western Australia Telephone +618-9413 2400 wasales@moffat.com.au

New Zealand moffat.co.nz

Moffat Limited

Rolleston 45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz

Auckland Telephone +64 9-574 3150 sales@moffat.co.nz





ISO9001 Quality Management Standard

Designed and manufactured by

MOFFAT.

ISO9001

All Cobra products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd AN.C.01.19 / 1598

an Ali Group Company

