

## **PRODUCT FEATURES**

- With no centre pillar you can use trays and containers of varying sizes.
- This Pillarless range is perfect for kitchens looking to maximise their food storage.
- Complete with stainless steel top.
- Programmable electronic controller and display.
- Includes: Shelf x 4, lockable (115mm) Castors (20mm thread) x 4, Spanner and Spacer (for castors).
- Sold Separately: Optional Adjustable legs 150-180mm.



FT-126MA-A-N

2 Door (Pillarless), Underbench Freezer

Model Number: 97000944

## **PRODUCT SPECIFICATION**

| Interior   | Stainless Steel, ABS Plastic (Doors)            |
|--|---|
| Exterior   | Stainless Steel, Galvanized Steel (Rear/Bottom) |
|  | ABS plastic (Top & Bottom on Door)              |
| Effective Capacity   | 231L  |
| Temperature Control  | Microprocessor(Digital Temp Indication)         |
|  | Adjustable from -23 to -7°C                     |
| Evaporator   | Fin & Tube type                                 |
| Outside Dimensions   | 1200mm (W) x 600mm (D) x 815mm(H)               |
| Inside Dimensions  | 840mm (W) x 436mm (D) x 599mm (H)               |
| Refrigeration System   | Forced Air Circulation                          |
| Weight Net/Gross(kg)   | 72/77   |
| AC Supply Voltage  | 1 PHASE 220-240V 50Hz /10amp Plug               |
| Amperage   | Rated: 2.6A                                     |
| Refrigerant  | R404A   |
| Operating Conditions   | Ambient Temp.: 5-38°C                           |
|  | Voltage Range: Rated Voltage ±6%                |
| Electrical consumption   | 342W, Heater 371W,                              |
|  | Defrost 330W*, (GEMS) kWh/24h - 6.64            |
| Shelf load   | Maximum loading of each shelf is 60 kg          |
| *electric consumption are based on measurements of ambient temperate of 38 and power supply of 230v 50hz |   |


## **INSTALLATION REQUIREMENTS**

- Equipment should not be located in direct sunlight or next to sources of high heat.\*
- Allow at least 50 cm clearance between the front panel air inlet/outlet and the wall or other equipment for proper air circulation.\*

\*Refer to manual for full installation & maintenance requirements



## TECHNICAL DRAWING

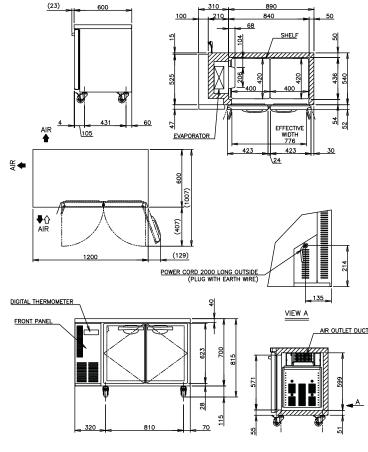



Additional 12 months extended warranty if registered on-line within 4 weeks of purchase. **hoshizaki.com.au** 

Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes. Copyright © 2022 Hoshizaki Lancer Pty Ltd. All right reserved.