

## Datasheet - Chef'sCombi 10 1/1GN Electric



**Description** - All-in-one multifunctional cooking equipment: convection, steam cooking, roasting, grilling, baking, air frying, poaching, simmering, low temperature cooking, defrosting, regeneration, holding. Advanced cooking technologies for premium cooking results with powerful heating elements, lambda sensor-controlled climate regulation, high-performance dehumidification, controlled even heat distribution and humidifying function.

### Capacity:

- 10 1/1-GN pans
- Removable standard hinging rack with 67mm slide-in rail spacing.
- Selection of accessories for various procedures such as baking, braising, or grilling.

### Modes:

- Convection: from 30 to 300°C
- Steam: from 30 to 100°C
- Hot Steam: from 101°C to 130°C
- Combination: from 30 to 300°C

## Technical characteristics

CODE	
Article code	HICS101E
Technical code	HICS101E

DIMENSIONS (H x W x D)	
Exterior (total)	1076 x 852 x 893 mm
Exterior (body)	932 x 852 x 826 mm
Maximum working height*	1568 / 1746 mm
Minimum working height *	965 / 1143 mm
Oven height + base*	1767 / 1945 mm

\* Depending on the height of the HOBART base used as an accessory

CAPACITIES	
Number of seats per day	150
GN 1/1 trays (325 x 530mm) Max	10
depth of trays	65 mm
Spacing between floors	67 mm
Maximum load per level Total	5 kg
maximum load	50 kg

<b>WEIGHT (gross / net)</b>	175 kg / 155 kg
-----------------------------	-----------------

PACKING	
Height x Width x Projection	1270 x 940 x 900 mm

MINIMUM DISTANCES / WALLS			
	LEFT	Back	RIGHT
Minimum deviation	50 mm	0 mm	50 mm
Standard	500 mm	0 mm	50 mm
Heat sources	350 mm	0 mm	50 mm

AIR EXHAUST AND THERMAL LOAD	
Latent thermal load	3276 W
Sensible heat emission	2184 W
Acoustic emission	< 70 dB (A)

CONSTRUCTION	
Muffle and Bodywork	Stainless Steel 18-10

CONNECTION SPECIFICS DATA	
LAN data interface	RJ45
WiFi data interface	IEEE 802.11 ac/a/b/g/n

ELECTRICITY	
<b>Three phase 415V+E+N</b>	
I. Max	32.0 A
Total power	19.8 kW
"Steam" power	19.0 kW
"Pulsed air" power	19.6 kW
Necessary protection	63A curve C or B circuit breaker and 30mA AC type differential circuit breaker

COLD FOOD WATER	
Pressure (Min / Max)	150/600 kPa (1.5 bar / 6 bar)
Max cold water temperature	23°C
Nature	Filtered at 131 µm
Water quality	Chloride Cl <sup>-</sup> : ≤ 50 mg/l (50ppm) Free Chlorine Cl <sub>2</sub> : ≤ 0.2 mg/l (0.2ppm) 6.5 ≤ PH ≤ 9
Conductivity	≥ 50 µS/cm
Connection	20/27 thread
Max. instantaneous consumption	12.7 l/min

Provide a shut-off valve nearby.

SOFT WATER	
Pressure (Min / Max)	150/600 kPa (1.5 bar / 6 bar)
Max softened water temperature	23°C
Nature	Filtered at 131 µm
Hardness	TH 4 to 14°e (60 to 200 ppm)
Water quality	Chloride Cl <sup>-</sup> : ≤ 50 mg/l (50ppm) Free Chlorine Cl <sub>2</sub> : ≤ 0.2 mg/l (0.2ppm) 6.5 ≤ PH ≤ 9
Conductivity	≥ 50 µS/cm
Connection	20/27 thread
Max. instantaneous consumption	7.7 l/min

Provide a shut-off valve nearby.

DRAIN	
Connection	Horizontal outlet Smooth tube Ø 40mm

The water discharged can be condensates at high temperatures, use materials adapted to these temperatures. It is imperative to have a siphon between the device and the drain network to prevent odors from rising.

## Installation conditions

National and local standards and regulations relating to the installation, use and operation of industrial cooking appliances must be respected. Local standards and provisions in force relating to premises ventilation systems must be respected. Refer to the installation and user manual available on our website - [www.hobartfood.com.au](http://www.hobartfood.com.au).

> To use the "SMARTCONNECT365" app, you must provide an RJ45 network socket or the possibility of connecting to a WiFi network (IEEE 802.11 ac/a/b/g/n) at the installation location. For optimal performance, provide a data transmission rate of at least 100 MBit/s.

## STANDARDS: Compliance with standards

**EN 60335-1:** European standards relating to the safety of electrical appliances.

**EN 60335-2-42:** European standards relating to the safety of electrical appliances.





**IP 25 and IK 9:** Protection indexes.

**EN 1672-2:** Hygiene.

**WaterMark Licence 26619**

**SEED Approval** or HOBART Supplied Standard & Standard plus HEPA Canopies - Confirm details - 1800 462 278

## Technical drawing

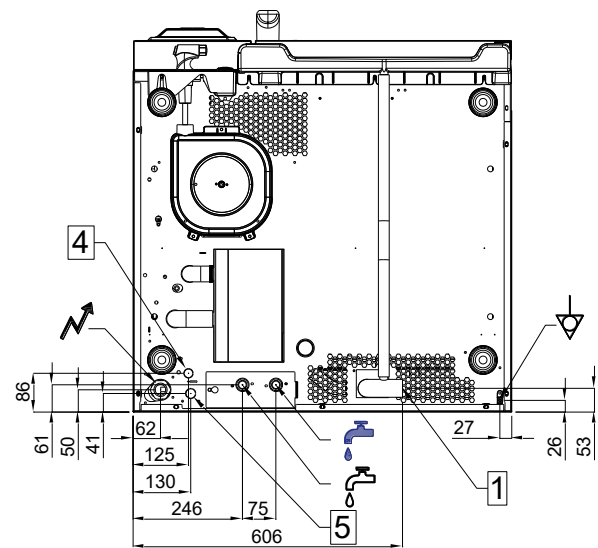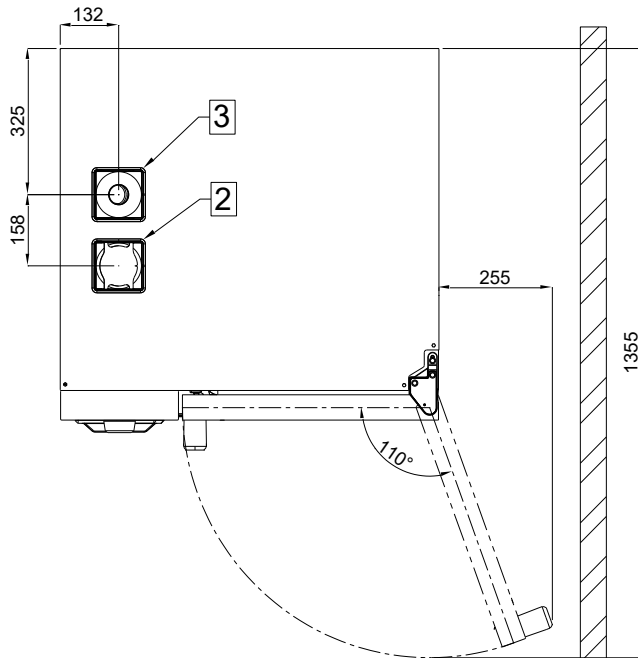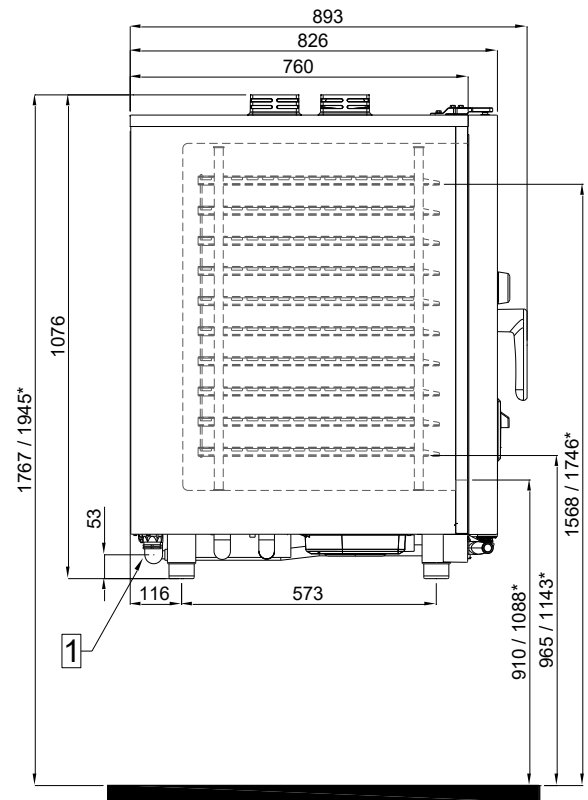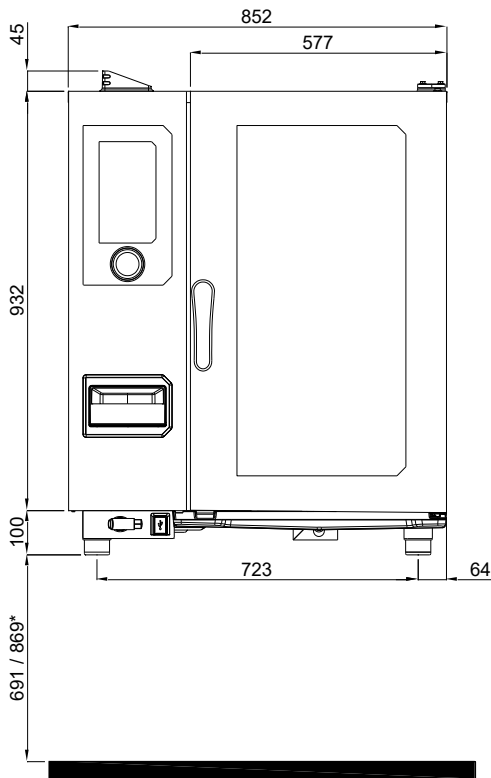

\* Depending on the height of the HOBART base used as an accessory



### ELECTRICAL connection

Electric inlet at 260 mm from the support / 950-1129\* from the floor  
(Allow a cable with 1.5m of slack)



### COLD WATER food

Water inlet at 80 mm from the support / 771-949\* from the floor



### SOFT WATER

Water inlet at 80 mm from the support / 771-949\* from the floor



### ÉQUIPOTENTIAL BONDING



### DRAIN

Drain outlet at 53 mm from the support / 744-922\* from the floor



### FLAPPER FIREPLACE

Stainless steel tube diameter 70 mm



### EVACUATION OF EXCESS VAPORS

Stainless steel tube diameter 45 mm



### ETHERNET PORT



### ENERGY SAVING OPTION