

HTY511DAUS

EASYLINE FULLY INSULATED PASSTHROUGH DISHWASHER - THREE PHASE

(6.7 KW SINGLE PHASE OPTION)

500x500 mm basket



GUARANTEED WASH PERFORMANCE

In commercial dishwashers, the rinse is the most important part of the wash cycle, as it is the only one performed with clean water. This is the reason why, at Smeg, we believe all commercial dishwashers must have **a rinse pump on board**, the only way to guarantee that optimal and constant pressure and temperature are maintained throughout the rinse cycle.

WE BELIEVE IN OUR QUALITY

All dishwashers are manufactured in our state of the art factory in Italy, where we monitor all phases of design, engineering and production. We believe in our quality and this is the reason why we are pleased to offer **Extended Warranty** on our Easyline dishwasher range.



PRODUCT FEATURES

- **Double skin, fully insulated hood and panels**
- Construction in AISI 304 stainless steel
- **HTR (High Temperature Rinse) system with atmospheric boiler and rinse pump**
- 2.5 litres water rinse cycle
- Approximately 15% water exchange every cycle
- Drain pump with triple stage dynamic filtration system
- Door opening height: 440mm
- Electronic controls with 3 wash programs
- Shortest wash program 90 seconds
- Soft start wash pump
- Automatic self-cleaning cycle
- Thermostop system to ensure correct rinse temperature
- Adjustable peristaltic pumps for detergent and rinse-aid injection
- Self-diagnostic system with error messages
- **24 months parts and labour warranty**

ACCESSORIES

- PB50D01 - 500x500mm basket. 18-plate Ø250mm
- PB50G01 - 500x500mm flat-bottomed basket
- WB50D01 - Wire basket. 18-plate Ø250mm
- WB50G01 - Wide-mesh wire basket with flat bottom
- WB50G02 - Wire basket with inclined bottom for stem glasses max Ø90mm
- WB50G03 - Wire basket with inclined bottom for stem glasses max Ø72mm
- WB50G04 - Wire basket with inclined bottom for stem glasses max Ø120mm
- WB50T02 - Wire basket for 7 GN1/1 20mm deep baking rins
- WB50T03 - Wire basket for GN1/1 60mm deep

HTY511DAUS


EASYLINE FULLY INSULATED PASSTHROUGH DISHWASHER - THREE PHASE

(6.7 KW SINGLE PHASE OPTION)

500x500 mm basket

TECHNICAL SPECIFICATIONS

Dimensions (mm) (WxDxH)	620x736x1530/2102	Minimum supply pressure (bar)	2.5
Basket (mm)	500x500	Drain pump	Yes
Door clearance (mm)	440	Rinse aid pump	Peristaltic
Type of interface	electronic	Detergent pump	Peristaltic
Supplied water temperature (°C)	from cold to 60°	Programme 1 (sec)	90*
Tank volume (litres)	17	Programme 2 (sec)	150*
Tank heating element (W)	2,200	Programme 3 (sec)	240*
Filtering system	Tank filter + selective filter	Special programmes	Total renewal of the water inside the tank Extra rinse Self-cleaning
Boiler volume (litres)	8	Thermostop	Yes
Boiler heating element (W)	6,000 - 9,000	Total power (W)	6,700 - 9,700 Single Phase (6,700W)
Wash pump (W)	700	Electrical connection	Three Phase (6,700 - 9,700 W)
Tank temperature (°C)	60°	Basket number	
Rinse pump	Yes	dishes	1 x PB50D01
Rinse temperature (°C)	85°	universal / glasses	1 x PB50G01
Adjustable temperatures	Yes	cutlery	1 x PHOOS02
Water consumption (litres/cycle)	2.5		

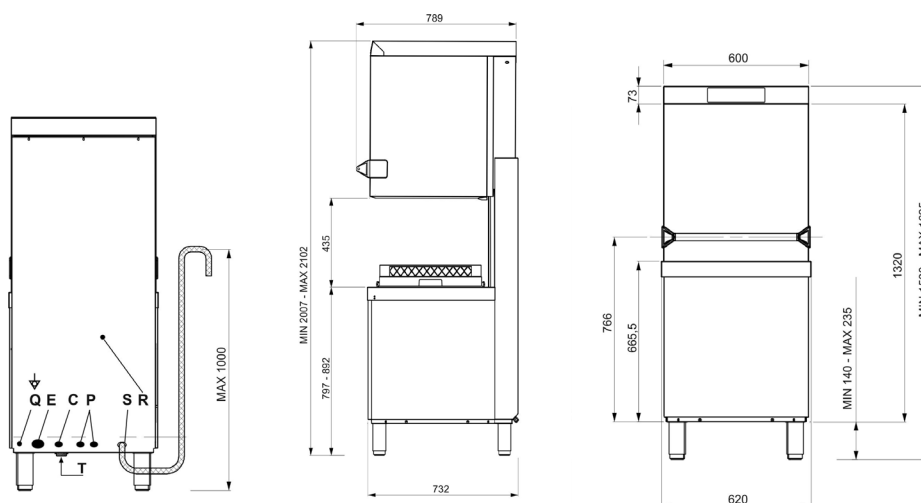

CONNECTION WIRING DIAGRAM KEY

R	Rear lower panel	P	Peristaltic doser tubes
C	Water supply tubing	E	Electrical power cable
S	Water drain tubing	F	External doser power supply cable input
Q	Equipotential terminal		

* Supplied water temperature >50°C and < 60°C and three-phase electrical connection whenever possible

