

NW Series Modular Dice Ice Machines – up to 456kg

NW 1008 AS OX Dice cube 10g, 22mm x 22mm x 22mm

NWH 1008 AS OX Half dice cube 6g, 10mm x 22mm x 28mm

NWL 1008 AS OX Large dice cube 15g, 28mm x 22mm x 28mm



Dice cube 10 g
W 22 x D 22 x H 22 mm



Half dice cube 6 g
W 10 x D 22 x H 28 mm



Large dice cube 15 g
W 28 x D 22 x H 28 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 456kg daily production rate
- Head only ice maker - requires a separate storage bin to store the ice produced
- Air cooled version
- Vertical evaporator spray-system technology
- XSafe - Natural Sanitation System
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- T304 grade stainless steel exterior
- Auto-alert indicator lights to show operation status and maintenance
- One touch cleaning for time and labour saving
- Front evaporator access for easy servicing
- Includes air filter, water and drain hose
- Double stack option available

Recommended storage bins


- NB 393 – 178kg storage capacity
- NB 530 – 243kg storage capacity
- NB 948 with CBT 48 EAMCD cover – 406kg storage capacity
- UBH 1100 – Upright storage bin with 553kg storage capacity



XSafe

NW Series Modular Dice Ice Machines – up to 456kg

NW 1008 AS OX, NWH 1008 AS OX, NWL 1008 AS OX

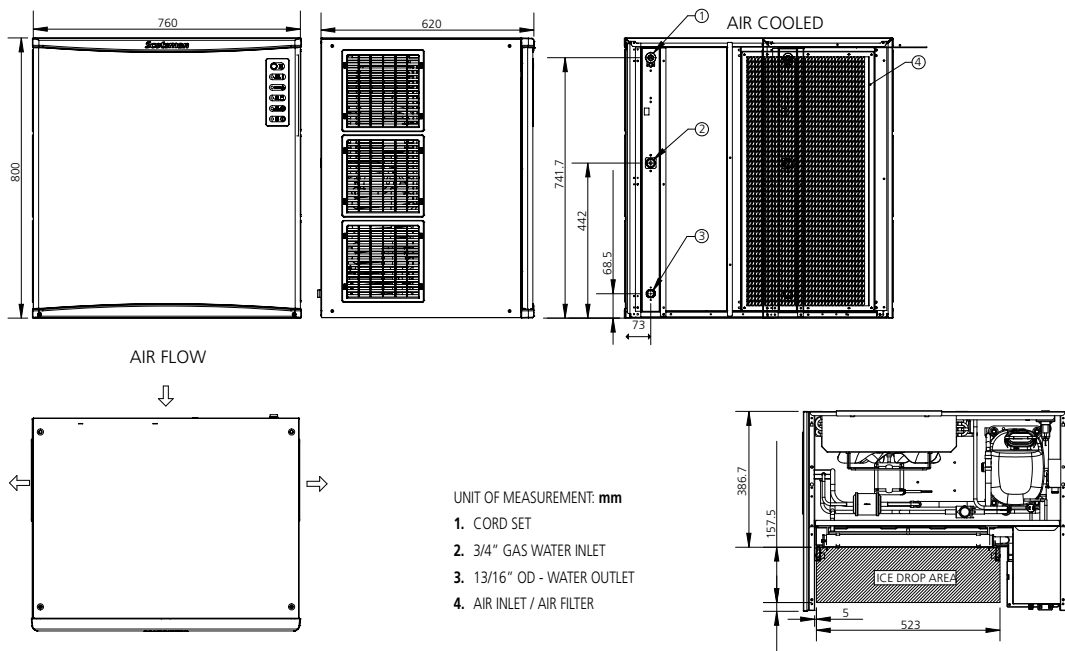

moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NW 1008 AS OX	485	456	380
NWH 1008 AS OX	485	456	380
NWL 1008 AS OX	485	456	380

Dimensions

Width: 760mm
Depth: 620mm
Height: 800mm
Nett weight: 105kg
Packed weight: 112kg

Water consumption

Air cooled version: NW 1008 AS 22.3 litres per hour

Electrical rating

Air cooled version: Single Phase: 230-240V, 1P+N+E,
50Hz, 2100W, 15A cordset supplied
Three Phase: 400-415V, 3P+N+E,
50Hz, 2500W, 10A

No. Circuit wire: Single Phase: 3
Three Phase: 5
Compressor: Single Phase: 7300W
Three Phase: 7300W
Energy consumption: Single Phase: 50.3kW/24hr
Three Phase: 23.1kW/24hr

Refrigerant type
R404a

Installation distance from wall

Rear 100mm
Sides 150mm
Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø 20mm

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2201