Project	
Rev.:	
Zone:	
Location:	



CR1657789

MODELLO

Q90SGL/G123

SERIE
QUEEN 9

GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet. Height of the work surface adjustable from 840 to

Tops with a thickness of 2 mm. Aisi 304 steel burner controlled by safety valve and thermocouple. Piezo ignition.

Adjustable temperature up to 350°C. Device for adjusting the height of the grids on two levels.

Perimeter splash guard risers (h max=12mm).

Canal with drainage hole and removable grease and residue collection. Internal drawer for collecting carbon residue.

Larger, recessed grease trough on the worktop, easier to clean and more capacious

HUMIDIFIER accessory for optimal management of several types of cooking.

Grill height adjustment for handling different types of cooking

4 Grill types available: meat, fish, mixed stainless steel and reversible cast iron meat/fish version

Changing the type of cooking also in the utility GAS Grill / lava stone, with dedicated accessories

In gas versions, the power is regulated by a continuously variable tap to adapt the heat of the hotplate to the type of cooking

Project	 	
Rev.:	 	
Zone:	 	
Location		



CODICE **CR1657789**

MODELLO

Q90SGL/G123

SERIE
QUEEN 9

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1657789
DEFINITION	Q90SGL/G123 PIETRALAV.GAS GHISA M120 TOP
COMMERCIAL LINE	QUEEN
SUPPLY	GAS
DIM. WIDTH	1200 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NETWEIGHT	1 Kg
VOLUME (net)	0.27
PACKAGE LENGTH	1240 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	570 mm
PACKAGE VOLUME	0,727 m3
GROSS PACKING WEIGHT	2 Kg
GAS POWER	37.5
GAS POWER (G25.3/25mbar)	36,00
CERTIFIED MODEL	Q90SGL/G12

Project	
Rev.:	
Zone:	
Locations	




CODICE **CR1657789**


MODELLO

Q90SGL/G123

SERIE
QUEEN 9

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

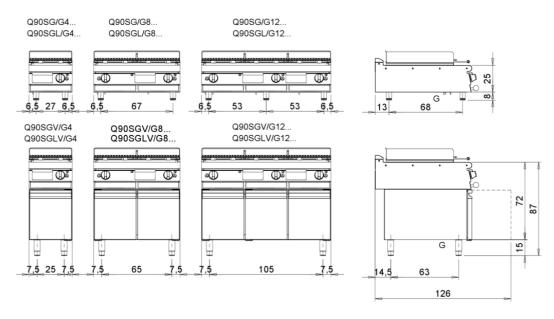



	Legenda - Legende - Key - Lége	ende	- Leyenda - Legenda
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
s	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = A2 =	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão		
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua		
	intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto		Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nivel
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno		

Project	
Rev.:	
Zone:	
Location	



CODICE **CR1657789**

MODELLO

Q90SGL/G123

SERIE
QUEEN 9

PRODUCT'S RANGE PLUS



4 Grill types available: meat, fish, mixed stainless steel and reversible cast iron meat/fish version



Smoker that can be installed on models M40-M80 - M120 for a barbecue flavour menu. Made of AISI304 stainless steel. Kit equipped with a guide for sliding the smoker hox




In gas versions, the power is regulated by a continuously variable tap to adapt the heat of the hotplate to the type of cooking

Changing the type of cooking also in the utility GAS Grill / lava stone, with


dedicated accessories



HUMIDIFIER accessory for optimal management of several types of cooking.



In the tap versions, the power is regulated by a Type 22PP enhanced flow tap that can be modulated for continuous operation to adapt the heat of the hotplate according to the type of cooking.



Grill height adjustment for handling different types of cooking

Project	
Rev.:	
Zone:	
Locations	



CODICE **CR1657789**

MODELLO Q90SGL/G123 SERIE
QUEEN 9

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1658229	Q9CAA	M40 STEEL FLAME ARRESTERS
CR1658239	Q9CAG	CAST IRON FLAME ARRESTORS M40
CR1658249	Q9KP4	M40 STONEWARE KIT
CR1353909	DCPL6	Lava stone package 4 kg
CR1658259	Q9AF	Q90 SUPER GRILL SMOKER KIT
CR1658279	Q92GG	Cast Iron Grid M40 D9
CR1658289	Q92GTI	Stainless steel rod grille M40 D9
CR1658549	Q92GI	Stainless Grid M40 Q9
CR1658359	Q9KU12G	QUEEN 9 M120 GAS GRILL HUMIDIFIER KIT