

specifications


Refrigeration

RF6.UBR.1.SD

ReFlex Series, 1 Solid Door Underbench Fridge





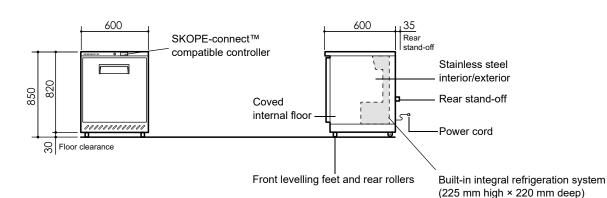

Worktop n.a.

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temperature 30°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect™ 1°C to 15°C)

GEMS class 4M

GEMS energy consumption 1.30 kWh/24 h

GEMS annual running cost \$143 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class | 4 | Interior lighting | n.a

Power cord Supplied with 1.6 m, 10 amp plug and lead Power supply 220-240 volts a.c. 50 Hz, single phase supply

Current draw 1.0 amps

REFRIGERATION

Controller SCS Connect (SKOPE-connect™ compatible)

Connectivity interface Bluetooth wireless technology
Refrigeration system
Refrigerant R600a/45 g (natural refrigerant)

Nominal capacity

Heat rejection (avg/peak)

Drainage

200 watts

55 watts/60 watts

No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

DIMENSIONS				
	External	Internal		
Height	850 mm	655 mm		
Width	600 mm	495 mm		
Depth	635 mm*	430 mm		
Floor area	0.38 m^2			
Weight	50 kg			
Gross volume	139 L			

Net volume 80 L

* Depth 635 mm includes 35 mm rear stand-off

Dimensional tolerances				
Before installing this cabinet allow the following dimensional				
tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5 mm			
More than 1 metre	than 1 metre -5 mm to +10 mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5 mm	+15 mm		
More than 1 metre	-5 mm to +10 mm	+15 mm		

Ventilation requirements		
Тор	Not required	
Sides	50 mm each side	
Back	35 mm (provided by rear stand-off)	
Bottom	30 mm (provided by feet)	



PSS0663 Rev. 1.5 Nov. 2022



