


specifications

RF7.UBR.3.GD

ReFlex Series, 3 Door (Glass), Underbench Fridge

Project: _____

Item No: _____

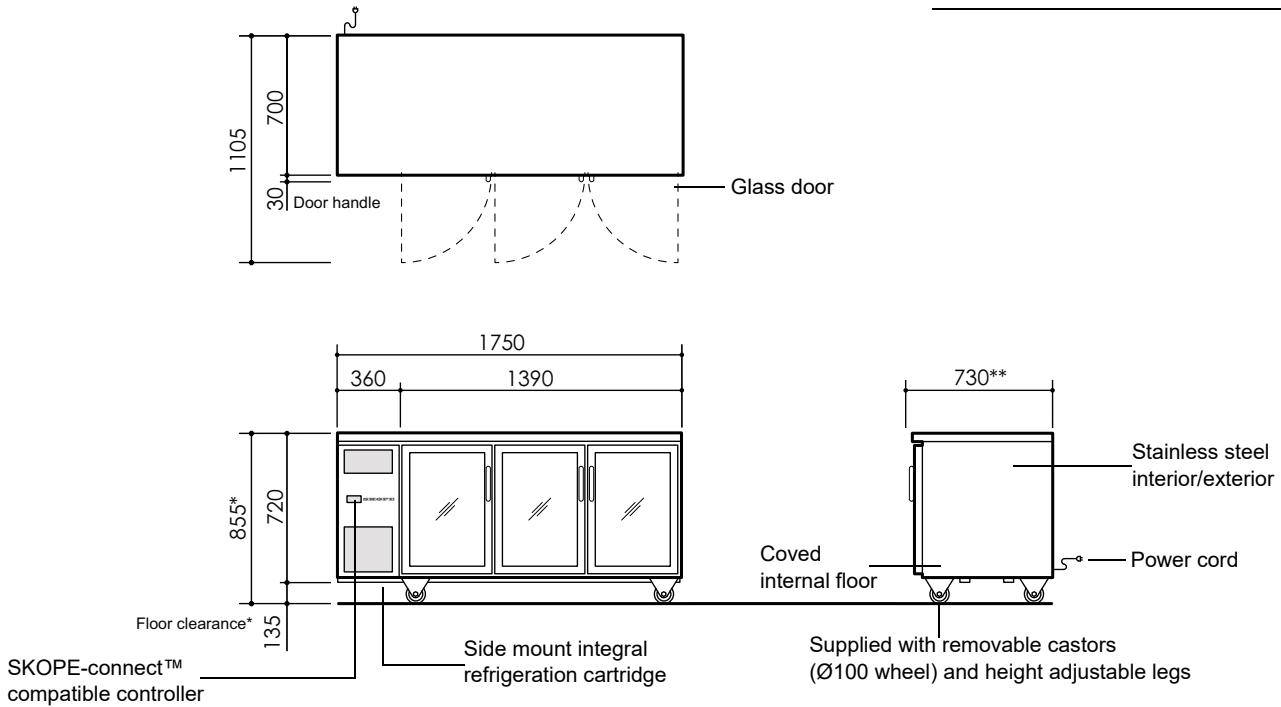

CABINET	
Doors	3 × self-closing, lockable, double glazed, double Low-E, glass swing doors. LH, LH, RH
Internal door opening	3 × door openings: 560mm high × 360mm wide
Shelves	6 × adjustable height shelves. - 2 × middle shelves: 455mm × 510mm deep. - 4 × outer shelves: 395mm wide × 510mm deep. Note: Bottom shelves supplied floor mounted, additional shelf clips are available on request.
Worktop	Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating cyclopentane foamed core)
Material	304 AISI stainless steel interior and exterior
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C)
GEMS class	4M1
GEMS energy consumption	3.77 kWh/24h
GEMS annual running cost	\$413 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior lighting	2 × 400mm, 4W LED lights
Power cord	Supplied with 2.6m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.0 Amps (includes unit 1.5 Amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Side mounted, integral, removable refrigeration cartridge (part number ULKCNI-0028)
Refrigerant	R290 / 95g (natural refrigerant)
Nominal capacity	650 Watts
Heat rejection (Avg/peak)	160 Watts/185 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	855mm*	570mm
Width	1750mm	1280mm
Depth	730mm**	530mm
Floor area	1.28m ²	
Weight	135kg	
Gross volume	387 L	
Net volume	319 L	

* With supplied castors fitted. See height variation below

** Includes 30mm door handle

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	Not required
Sides	Not required
Back	Not required
Bottom	Not required

PSS0598 Rev. 2.3 Nov. 2021

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

