
## specifications

## Refrigeration

## RF7.UPR.1.SD

ReFlex Series, 1 Solid Door, Upright Fridge

Project:

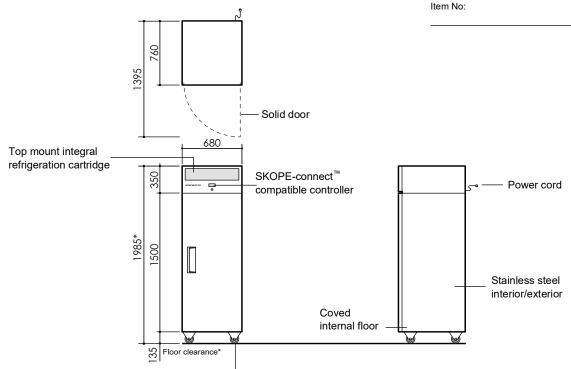

Supplied with removable castors

**CABINET** 

Doors 1 × self-closing, lockable, reversible, solid swing door. Supplied RH

Internal door opening 1 × door opening: 1375 mm high × 555 mm wide

Shelves 5 × adjustable height shelves: 540 mm wide × 530 mm deep

Worktop

Material 304 AISI stainless steel interior and exterior

**PERFORMANCE** 

Max. ambient temp.

Temperature range 1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C)

**GEMS** class 5M1

GEMS energy consumption 2.00 kWh/24 h

\$219 p.a. (@ \$0.30/kWh) GEMS annual running cost

**ELECTRICAL** 

Electrical safety climate class | 5

Interior lighting 1 × 1200 mm, 12W LED light (door activated) Power cord Supplied with a 10 amp plug and 2 m lead Power supply 220-240 volts a.c. 50 Hz, single phase supply

Current draw 2.0 amps (includes unit 1.5 amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect™ compatible)

Connectivity interface Bluetooth wireless technology

Top mounted, integral, removable refrigeration cartridge Refrigeration system

(part number UTKCNI-0017)

Refrigerant R290/70 g (natural refrigerant)

Nominal capacity 450 watts Heat rejection (avg/peak) 85 watts/100 watts No plumbing required

Email: skope@skope.com, Website: www.skope.com

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

DIMENSIONS				
	External	Internal		
Height	1985 mm*	1395 mm		
Width	680 mm	560 mm		
Depth	760 mm	600 mm		
Floor area	0.52 m <sup>2</sup>			
Weight	115 kg			
Gross volume	469 L			
Net volume	363 L			
* With supplied castors fitted. See height variation below				

Height variation		
Supplied castors	1985 mm	
Height adjustable legs	1995 to 2035 mm	
No castors or legs	1850 mm	

Dimensional tolerances				
Before installing this tolerances:	owing dimensional			
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5 mm			
More than 1 metre	-5 mm to +10 mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5 mm	+15 mm		
More than 1 metre	-5 mm to +10 mm	+15 mm		

Ventilation re	entilation requirements	
Тор	300 mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0588 Rev. 2.14 Apr. 2023

