
specifications

SIX PIP Refrigeration

Project:

RF7.UPR.2.SD

ReFlex Series, 2 Solid Door, Upright Fridge

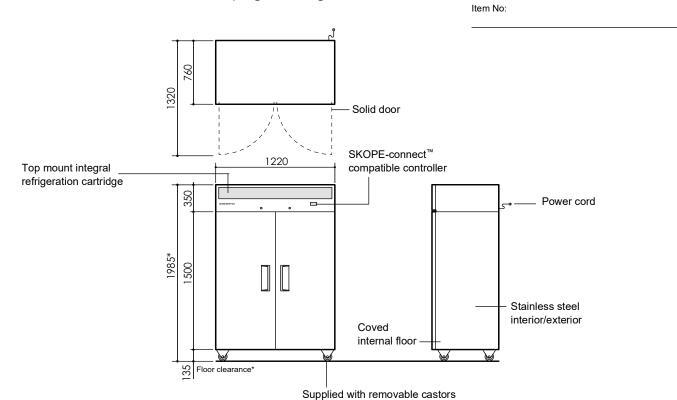

CABINET	
Doors	2 × self-closing, lockable, solid swing doors. LH, RH
Internal door opening	2 × door openings: 1375 mm high × 495 mm wide
Shelves	10 × adjustable height shelves: 530 mm wide × 530 mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C)
GEMS class	5M1
GEMS energy consumption	3.91 kWh/24 h
GEMS annual running cost	\$428 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior lighting	2 × 1200 mm, 12W LED lights (door activated)
Power cord	Supplied with a 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	2.0 amps (includes unit 1.5 amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect [™] compatible)
Connectivity interface	Bluetooth wireless technology
Refrigeration system	Top mounted, integral, removable refrigeration cartridge (part number UTKCNI-0018)
Refrigerant	R290/90 g (natural refrigerant)
Nominal capacity	650 watts
Heat rejection (avg/peak)	165 watts/205 watts
Drainage	No plumbing required
Dramage	

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

DIMENSIONS External Internal Height 1985 mm³ 1395 mm Width 1220 mm 1100 mm Depth 760 mm 600 mm Floor area 0.93 m² Weight 159 kg Gross volume 921 L Net volume 712 L * With supplied castors fitted. See height variation below

Height variation	
Supplied castors	1985 mm
Height adjustable legs	1995 to 2035 mm
No castors or legs	1850 mm

Dimensional tolerances					
Before installing this cabinet allow the following dimensional tolerances:					
Linear dimensions	Overall cabinet di	imensions			
Less than 1 metre	±5 mm				
More than 1 metre	-5 mm to +10 mm				
	Length of multiple cabinets				
	At each joint	At each end wall			
Less than 1 metre	±5 mm	+15 mm			
More than 1 metre	-5 mm to +10 mm	+15 mm			

Ventilation requirements		
Тор	300 mm	
Sides	Not required	_
Back	Not required	
Bottom	Not required	

PSS0589 Rev. 2.14 Apr. 2023

