


specifications

RF8.UPC.2.SD

ReFlex Series, 2 Door (Solid), Upright Combo, Fridge/Freezer

Project: _____

Item No: _____

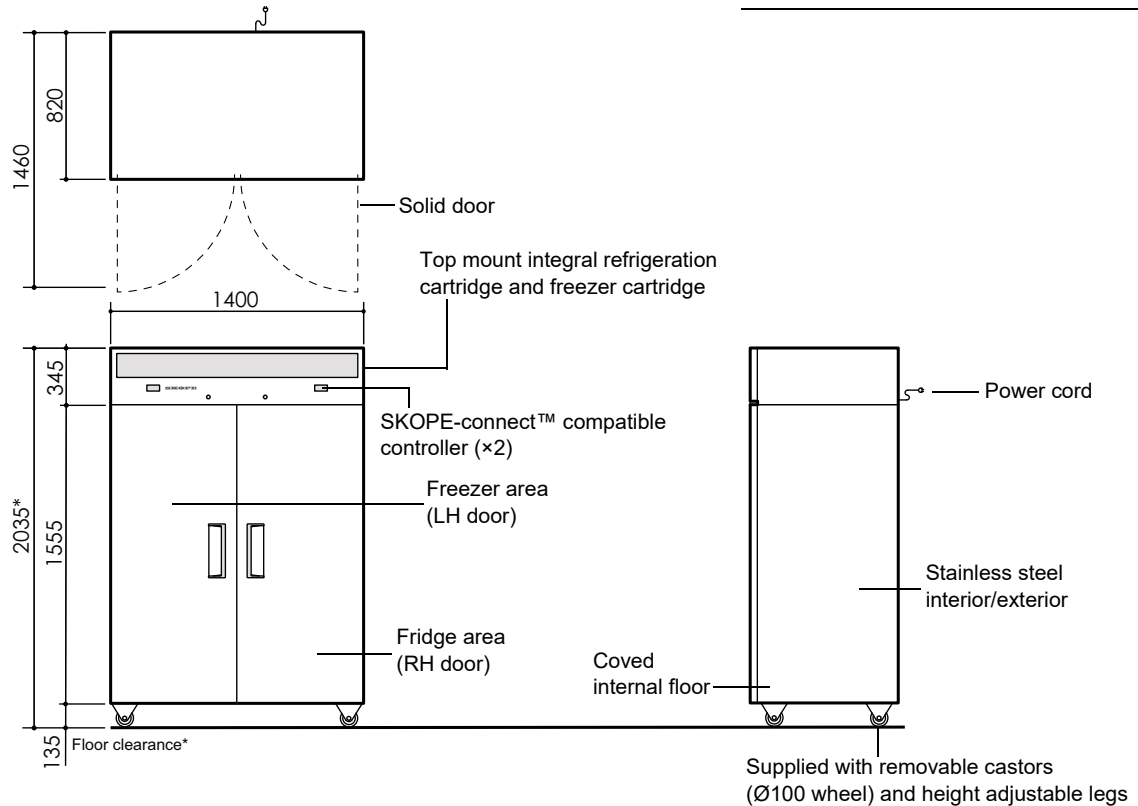

CABINET	
Doors	2 × self-closing, lockable, solid swing doors. LH, RH
Internal door opening	2 × door openings: 1415mm high × 545mm wide
Shelves	10 × adjustable height shelves: 530mm wide × 595mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	Fridge: 1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C) Freezer: -21°C to -18°C (adjustable with SKOPE-connect™ -26°C to -12°C)
GEMS class	5M1 & 5L1
GEMS energy consumption	9.36 kWh/24h
GEMS annual running cost	\$1026 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior lighting	2 × 1200mm, 12W LED lights (door activated)
Power cord	Supplied with 1 × 2.9m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	6.0 Amps (includes units 1.5 Amps and 3.9 Amps)
REFRIGERATION	
Controller	2 × SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable refrigeration cartridge (UTKNI-0017), and top mounted, integral, removable freezer cartridge (UTKDNI-0019)
Refrigerant	Fridge: R290 / 70g, Freezer: R290 / 94g (natural refrigerant)
Nominal capacity	Fridge: 450 Watts, Freezer: 550 Watts
Heat rejection (Avg/peak)	395 Watts/485 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal (×2)
Height	2035mm*	1435mm
Width	1400mm	550mm
Depth	820mm	655mm
Floor area	1.15m ²	
Weight	227kg	
Gross volume	517L×2	
Net volume	403L×2	

* With supplied castors fitted. See height variation below

Height variation	
Supplied castors	2035mm
Supplied height adjustable legs	2045-2085mm
No castors or legs	1915mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserves the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

PSS0592 Rev. 2.32 Nov. 2021

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

