





Undercounter Traywasher

W 865mm x D 660mm x H 845mm

Washtech's TW is a powerful, highly durable, simple-to-use and easy-to-maintain undercounter traywasher. With an oversized internal chamber and dual wash and rinse systems, the TW will wash baking trays, mixing bowls, dishes, cutlery and cups much more efficiently and hygienically than manual cleaning processes.

The TW features Washtech Hybrid Controls which combine stainless steel IP65 switches and tried-and-tested switchgear with a bulletproof and customisable electronic timer.

Since 1981 Washtech commercial dishwashers have been constructed from heavy duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, you can rely on your Washtech.

Standard Features

- · Versatile 2 and 4 minute cycles
- Large internal wash chamber with useable area of W 800mm \times D 545mm \times H 470mm
- Low hot water consumption of 3.3 litres per cycle
- Washtech Hybrid Controls
- · Heavy duty stainless steel construction
- QuikConnect (Plug & Play) installation, supplied complete with:
 - o Water supply hose
 - Dual detergent and rinse aid pumps with injector lines and chemical level sensors
 - o Drain pump with outlet hose
 - o 15 amp plugset
 - o No commissioning required
- Robust stainless steel wash and rinse arms with precision stainless steel jets
- Low chemical alarm lights and priming switches
- Triple heavy duty stainless steel filtration system including dual scrap trays, wash inlet filter and drain filter
- Hands-free AutoDrain
- · Comprehensive 5-2-1 warranty

Includes:

- 1x 600 70028 500mm dish rack
- 1x60070029 500mm cup rack
- 2 x C660503 cutlery container
- 1x 36110030 TW carriage


























TW

Undercounter Traywasher

W 865mm x D 660mm x H 845mm

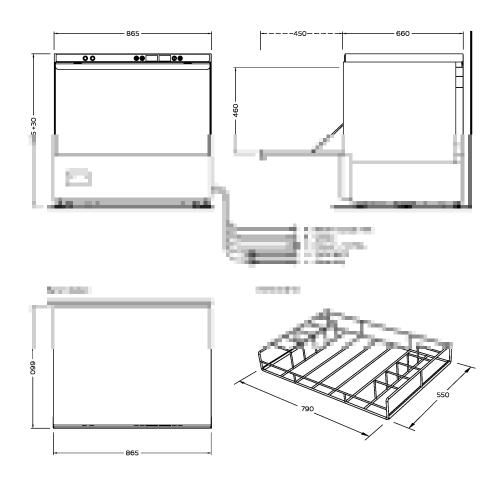

Α	Hot water Temperature 65°C					Dimensions Width	Machine 865	Packed 980
	Connection	3/4" male; hose supplied 200–350kPa				Depth	660	800
	Pressure					Height	845	990
	Flow	20 lit	res p	er min		Weight	95	111
	Quality	Pota	ble -	refer table	9	Cubicmetres		0.78
	Backflow Prevention	Atmo	osphe	eric Vacuui	m Breaker			
	Consumption	3.3 li	tres p	oer cycle		Water Quality	Min	Max
						рН	7	8
В	Waste	·					20	100
	Connection	Hose	sup	olied for 38	Bmm open	Cl-		100
		standpipe 750 high or connection				SO ₄		400
		to sink trap						0.1
						Mn		0.5
С	Electrical	V	Hz	A/phase	max kW	Cu		0.05
	Single Phase	240	50	15	3.75	Cl_2		0.1

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine. Power supply MCB should be rated 20% higher than the current rating of the machine. Isolating water valve must be readily accessible *Consumption may vary with site conditions.



moffat.com.au

Australia Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9158 3833 vsales@moffat.com.au

New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia Telephone 03-9518 3888 vsales@moffat.com.au

Queensland Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone 08-9202 6820 wasales@moffat.com.au



All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design. manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd Version: 1901

an Ali Group Company

