



XL

Economy Heavy Duty Passthrough Dishwasher – 500mm rack **W 750mm x D 765mm x H 1530mm**

Washtech's XL is a powerful, highly durable, simple-to-use and easy-to-maintain passthrough dishwasher. With one of the industry's lowest water consumption rates along with leading rinse heating, the XL provides excellent wash results in less time, while being light on operating costs and the environment.

The XL features Washtech Hybrid Controls which combine IP67 stainless switches, tried-and-tested switchgear, with a customisable electronic timer.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech dishwasher will not let you down.

Standard Features

- Autostart on hood closure 40, 60 and 90 second wash cycles
- Washes up to 1,620 plates per hour/2,250 glasses per hour
- Low hot water consumption of 2.4 litres per cycle
- Suitable for install in a bench gap of 640mm
- Washtech Hybrid Controls
- Self-cleaning cycle
- Easy Installation supplied complete with:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - No commissioning required
- Heavy-duty stainless steel construction and wash manifold
- Robust stainless steel wash and rinse arms with precision stainless steel jets
- Double heavy duty stainless steel filtration system including dual scrap trays and separate wash inlet filter
- Watermark approved backflow prevention
- Comprehensive 5-2-1 warranty

Includes:

- 2 x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery basket (C660508)
- 1x cutlery container (C660503)
























XL

Economy Heavy Duty Passthrough Dishwasher - 500mm rack W 750mm x D 765mm x H 1530mm

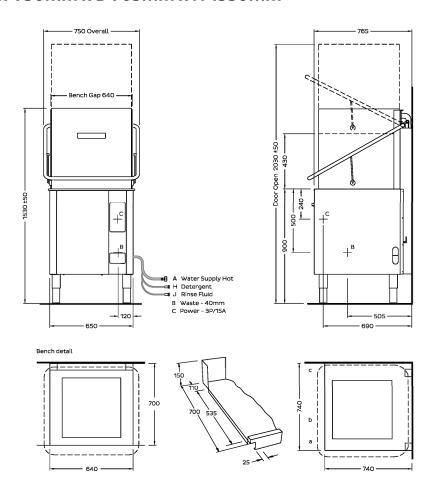

Α	Hot water Temperature Connection Pressure Flow Quality Backflow Prevention Consumption	65°C 3/4" male; hose supplied 200-350kPa 20 litres per min Potable - refer table Atmospheric Vacuum Breaker 2.4 litres per cycle*
В	Waste Connection Line	1.5" BSP 2" BSP

С	Electrical	V	Hz	A/phase	max kW
	Three Phase	415	50	15	9.00

Corner Installation Notes:

- a. Machine must face left for easy access to controls
 b. Allow 300 clearance to front for service access
- Splashback return must be no higher than 150

 $Refer operator \ manual \ for \ installation \ instructions. \ Isolating \ switch \ must \ be \ within \ 1m \ of, \ and \ not \ directly$ behind the machine.

*Consumption may vary with site conditions.





Australia

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9158 3833 vsales@moffat.com.au

New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone 08-9202 6820 wasales@moffat.com.au



All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design. manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd Version: 1903

an Ali Group Company

Dimensions

Weight Cubicmetres

Water Quality

. Hardness ppm

Width

Depth Height

SO₄

Fe

Mn

Cu

 Cl_2

Machine

750 765

1530

120

Min

20

Packed

800 950

141

1.1

Max

100

400

0.1

0.5

0.1

0.05

