

M2⁻⁶⁰⁵

PASSTHROUGH DISHWASHER NARROW GAUGE CABINET



STANDARD FEATURES

607mm width cabinet and 595mm benchgap
60, 120 and 180 second cycles
Wash capacity of up to 1,080 plates per hour
Touchscreen controls with versatile Heads Up Display
1.0HP soft start wash pump
Dual chemical pumps
Assured rinse with break tank and booster pump
Hands-free drainage system with sump and drain pump
Two-stage stainless steel wash and drain filtration
Heavy-duty stainless-steel construction and manifold
Independent stainless-steel arms
Uprateable power options for rapid rinse recovery

2x 500mm dish rack (600 70028)
1x 500mm cup rack (600 70029)
1x cutlery container (C660503)
1x quick connection kit (all hoses and 1p/15A plugset)

SPECIFICATIONS

A - Hot Water

Temperature	65°C*
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	10L per minute*
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage


Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical	V	Hz	A/ph	Max kW
Single phase	230	50	15	3.25
Single phase	230	50	25	5.75
Three phase	400	50	15	7.50

*Suitable for connection to low inlet water temp, flow and/or pressure supplies.
Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

WASHTECH®

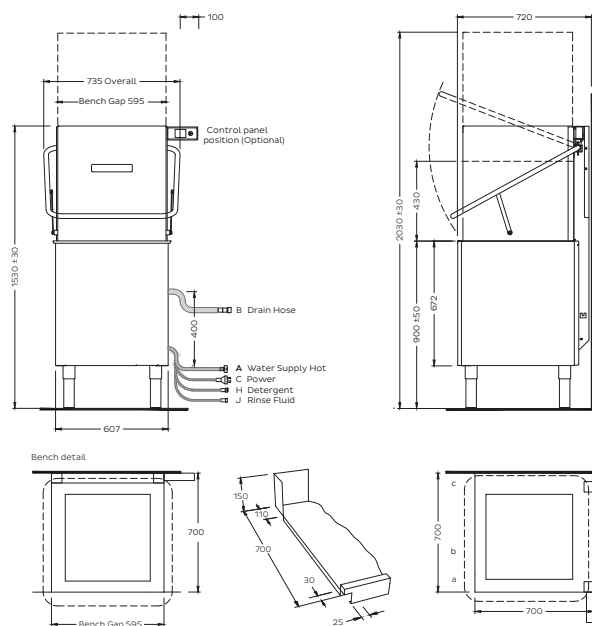

Dimensions

	Machine	Packed
Width (mm)	735	760
Depth (mm)	710	820
Height (mm)	1530	1460
Weight (kg)	94	125
Volume (m3)		0.91

Water Quality

	Min	Max
pH	7	8
TDS (ppm)	1	135
Hardness		100
Cl-		100
SO4		400
Fe		0.1
Cl2		0.1

Corner Installation Notes:

- Machine should be installed so racks are pushed into the back of the machine.
- Allow 300mm clearance to front for service access.
- Splashback return to be no higher than 150mm.

Touchscreen Control:

- Bracket supplied with controls enables install either side, under bench or on wall.
- Consult Operator Manual for full details on correct installation.

an Ali Group Company



the spirit of excellence